

UNCLASSIFIED

AD NUMBER	
AD095319	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO:	Approved for public release, distribution unlimited
FROM:	Distribution authorized to DoD only; Foreign Government Information; 19 JUN 1944. Other requests shall be referred to The British Embassy, 3100 Massachusetts Avenue, NW, Washington, DC 20008.
AUTHORITY	
DSTL, AVIA 26/694, 4 Nov 2009; DSTL, AVIA 26/694, 4 Nov 2009	

THIS PAGE IS UNCLASSIFIED

**CONFIDENTIAL**  
**A 95319**

**Armed Services Technical Information Agency**

Reproduced by  
**DOCUMENT SERVICE CENTER**  
**KNOTT BUILDING, DAYTON, 2, OHIO**

This document is the property of the United States Government. It is furnished for the duration of the contract and shall be returned when no longer required, or upon recall by ASTIA to the following address: **Armed Services Technical Information Agency, Document Service Center, Knott Building, Dayton 2, Ohio.**

**NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.**

**CONFIDENTIAL**

AD No. 95819

ASTIA FILE COPY

Ex - 1114

COPY No. 50

U.S. CONFIDENTIAL  
MODIFIED HANDLING AUTHORIZED

CENTRAL INTELLIGENCE DIVISION  
REF. 44/ 2886.

RESTRICTED

JEI  
No. 5288

# T.R.E. REPORT

JEI/A  
6288

No. T 1692

INFORMATION HAS BEEN SENT TO THE LONDON OFFICES  
U.S. NAVAL ATTACHE. THE U.S. MILITARY ATTACHE  
AND U.S. A.D. AS WELL AS TO BRITISH MISSIONS IN U.S.A.

(Attention is called to the penalties attaching to any infraction of the Official Secrets Act.)

This document is the property of H.M. Government.

It is intended for the use of the recipient only, and for communication to such officers under him as may require to be acquainted with the contents of the report in the course of their duties. The Officers exercising this power of communication will be held responsible that such information is imparted with due caution and reserve.

Any person other than the authorised holder, upon obtaining possession of this document by finding or otherwise, should forward it, together with his name and address, in a closed envelope to The Secretary, Ministry of Aircraft Production, Church House, Westminster, S.W.1. Letter postage need not be prepaid, other postage will be refunded.

All persons are hereby warned that the unauthorised retention or destruction of this document is an offence against the Official Secrets Acts 1911—1920.

(1908) Wt. 50984—4723 15M 3/44 G.S.S. Gp. 620

JUN 13 1956

U.S. No. 4000

56AA 25420

# U. S. CONFIDENTIAL

T.R.E. REPORT NO. T.1692  
3L/R22/SCC/GTH

MODIFIED HANDLING AUTHORIZED ~~SECRET~~

## SIMPLIFIED MODULATOR FOR COMPONENT TESTING

### Summary

It is frequently necessary to construct a modulator for the purpose of life-testing or factory-testing major items such as valves and networks. A straightforward system for use in these cases was devised. It contains no valves other than H.T. rectifiers and a Trigatron or open gap. The small number of components involved renders the unit readily serviceable, reliable and trouble-free.

### General Principles

The basic circuit is shown in Drawing No. ATR.70/775 Figure 1. A high voltage transformer is grounded at one end and the other end is attached to the network via a rectifier, arranged to charge the capacity negatively. The same transformer winding is likewise connected to a second rectifier in opposition with the first. This rectifier charges a small condenser C (100 to 500  $\mu\text{F}$ ) connected between the trigger electrode of a spark gap S and earth.

The spark gap S, which may be CV85, CV125 or CV100 according to voltage requirements, is used to discharge the network N into the load R. The sequence of operation is as follows. N is charged negatively during one half of the supply cycle and the negative charge is maintained. On the positive half-cycle of the supply the condenser C charges positively through a resistance R1 (about 1 m-ohm in value) to a value sufficient to break down the trigger-anode gap. The main charge in N thereafter discharges into the load R. The limiting resistance R1 is used to reduce the current through the trigger-anode-ground circuit to a reasonably low value. At the same time R1 is such that the time-constant CR1 does not prevent the rise of voltage of C from being nearly equal to that of the supply waveform. The resistance R2 across C is generally 10/20 times R1 in value and the time-constant CR2 is roughly equal to a quarter of the time of one cycle of the supply frequency. None of the values is critical, however, and a fairly extensive range of frequency can be tolerated on a given system arranged with the above principles in view.

The network N is charged to nearly the peak negative value of the secondary waveform. Likewise the condenser C may be charged to approximately the peak positive value (provided CR1 and R2 are properly chosen). It may be found desirable to have this positive value higher than is obtained from a single common winding though this depends on the characteristics of the gap. In such cases it is not difficult to extend the winding to give the extra voltage at a low current rating for triggering purposes.

### Operation as a Full-Wave Circuit

The mode of operation on full-wave output can be deduced from Figure 1 and Figure 2 of Drawing GTR70/814. The output pulse is always negative in this arrangement. The circuit constants were chosen for a supply of 50 c/s frequency (output repetition rate 100 pps). The positively charged network requires inversion of the gap V6 and the anode and trigger are connected by 20 M-ohms. The positive charging of the triggering condenser is effected through the blocking condenser of capacity .002  $\mu\text{F}$ . Thus 0.8 of the peak voltage E is available for breakdown of the trigger electrode. This fraction could be increased if desired by reducing the trigger capacity to less than 500  $\mu\text{F}$ .

### Change of Repetition Rate

This is only effected by altering the supply frequency. However it is usually desirable to maintain constant repetition rate and this is  
/automatically

automatically ensured. A 50 c/s source can be used at 50 or 100 pps. Generators of 400 and 500 c/s are available and aircraft generators may be used to cover ranges from 800 c/s to 2500 c/s. by changing gear-ratios. Thus frequencies separated by discrete steps may be made available and repetition rates from 50 to 5000 pps realised.

#### Typical Waveforms

The waveforms observed at various parts of the circuit are shown in Drawing ATR70/775, Fig.1, and Drg. GTR70/814, Fig.2, for half-wave and full-wave operation respectively. The last refers to operation at 100 pps. with a circuit operating on a 50 c/s input supply frequency. It will be noticed that there are slight differences observed in the pulse shapes obtained on the alternate cycles. It seems that these differences are due to the effects of stray capacities and inductances which are not exactly alike due to the asymmetry of components.

It should be noted that the circuit is of the hold-off type and deionisation difficulties are less marked. Higher repetition rates may be employed than with the constant current charging systems.

Authors: S.C. Curran  
G.T. Hawkins.








Approved for Circulation: A. Ward.

19th June, 1944.  
SCC/MB.

Numbered Pages: 2.

Drawings: ATR70/775  
GTR70/814.

S.No. 9087.

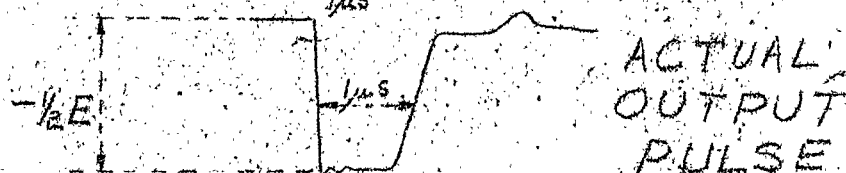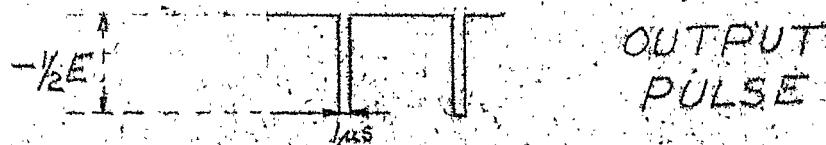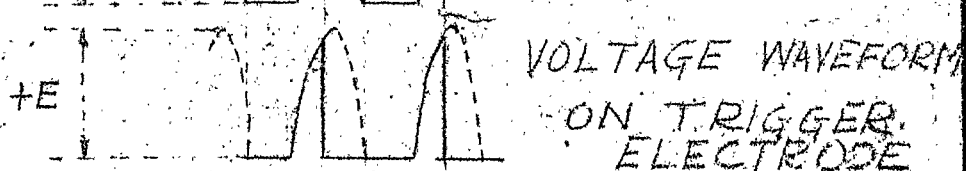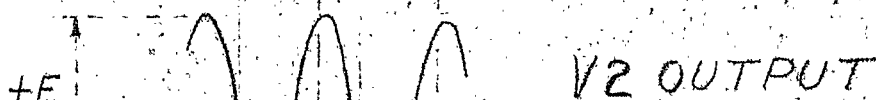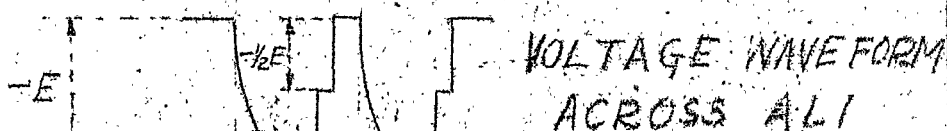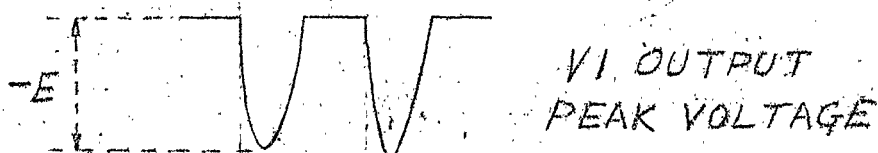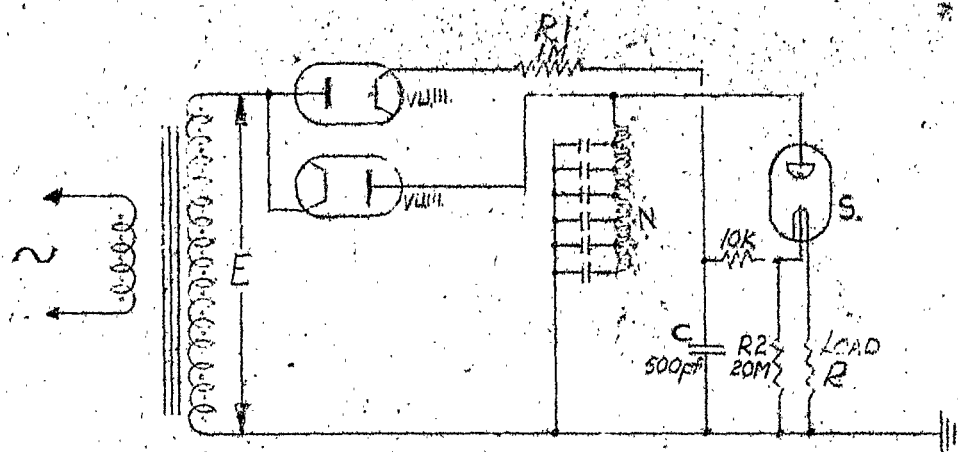

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH SPEC D.C.D. WT.1000.

TITLE: A SIMPLE TRIGGERED  
SPARK GAP MODULATOR  
HALF WAVE OPERATION

T.R.E. MAP



ISSUE	DATE	MOD. NO.				DRAWN	DATE
ONE	8-24					TRACED	
						CHECKED	
						APPROD	

DIAGRAM NO

A.T.R. 70/775



ITEM	DESCRIPTION AND AM. REF.	VALUE	RATING	TOL.
R1	1M	1M		
R2	10K	10K		
R3	1M	1M		
R4	20M	20M		
R5	20M	20M		
C1	500pF	500pF		
C2	500pF	500pF		
C3	500pF	500pF		
V1	VIIII			
V2	V			
V3	V			
V4	V			
V5	V			
V6	V			
AL1	157M0K			
AL2	"			

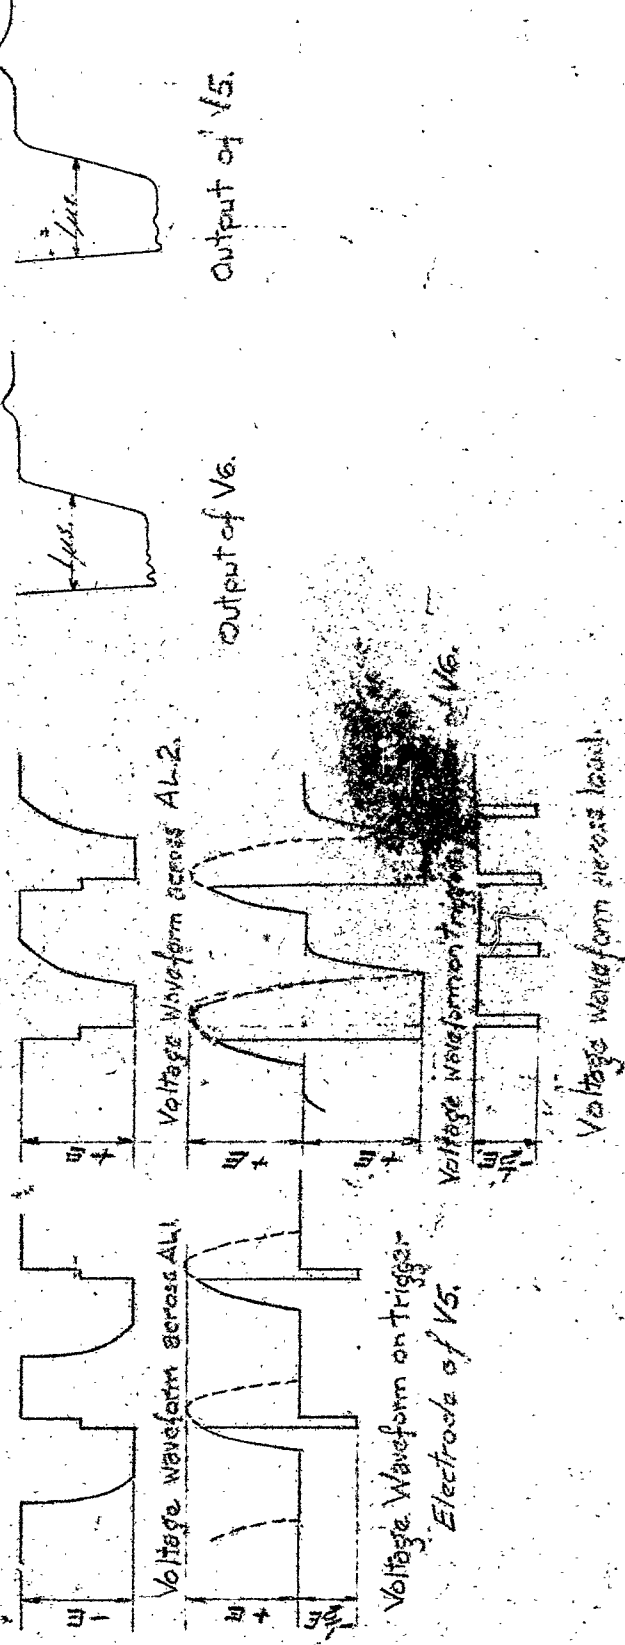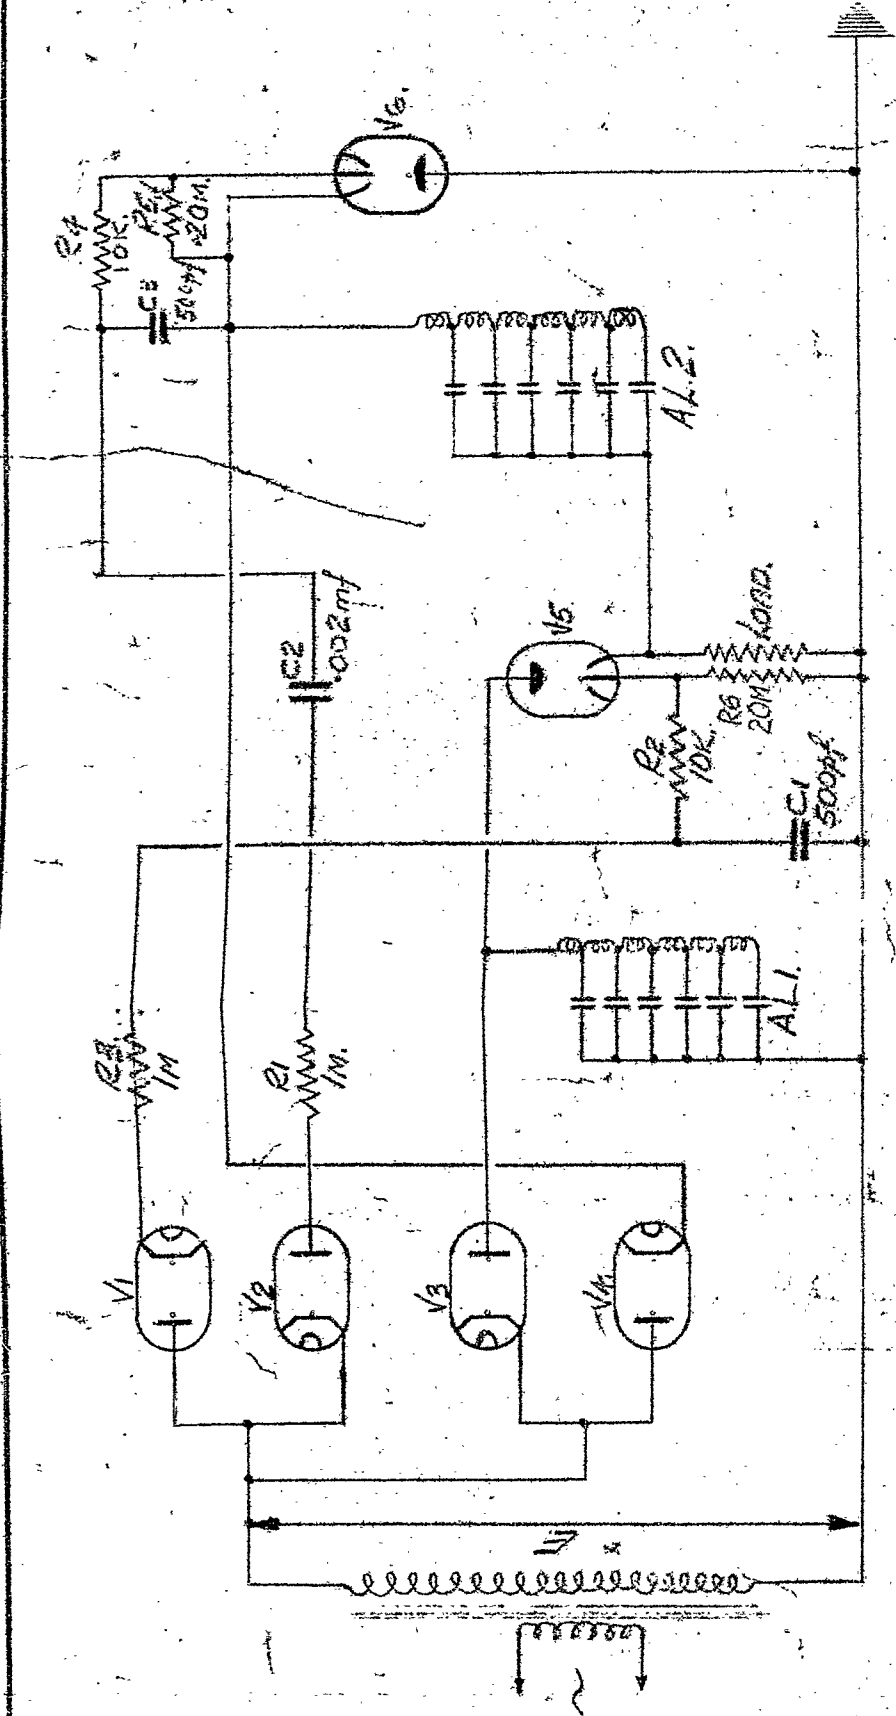



ISSUE	DATE	MOD. NO.
1	8-6-44	

TRE. MAP.  
TITLE: SIMPLE TRIGGERED SPARK  
GAP MODULATOR, FULL WAVE CARRIER.

DIAGRAM NO.  
G.T.R. 70/214



QTY	REF.	DESCRIPTION AND A.M. REF.	VALUE	RATING	TOL.
1	R1	10K	10K		
1	R2	10K	10K		
1	R3	10K	10K		
1	R4	10K	10K		
1	R5	10K	10K		
1	R6	10K	10K		
1	R7	10K	10K		
1	R8	10K	10K		
1	R9	10K	10K		
1	R10	10K	10K		
1	R11	10K	10K		
1	R12	10K	10K		
1	R13	10K	10K		
1	R14	10K	10K		
1	R15	10K	10K		
1	R16	10K	10K		
1	R17	10K	10K		
1	R18	10K	10K		
1	R19	10K	10K		
1	R20	10K	10K		
1	R21	10K	10K		
1	R22	10K	10K		
1	R23	10K	10K		
1	R24	10K	10K		
1	R25	10K	10K		
1	R26	10K	10K		
1	R27	10K	10K		
1	R28	10K	10K		
1	R29	10K	10K		
1	R30	10K	10K		
1	R31	10K	10K		
1	R32	10K	10K		
1	R33	10K	10K		
1	R34	10K	10K		
1	R35	10K	10K		
1	R36	10K	10K		
1	R37	10K	10K		
1	R38	10K	10K		
1	R39	10K	10K		
1	R40	10K	10K		
1	R41	10K	10K		
1	R42	10K	10K		
1	R43	10K	10K		
1	R44	10K	10K		
1	R45	10K	10K		
1	R46	10K	10K		
1	R47	10K	10K		
1	R48	10K	10K		
1	R49	10K	10K		
1	R50	10K	10K		
1	R51	10K	10K		
1	R52	10K	10K		
1	R53	10K	10K		
1	R54	10K	10K		
1	R55	10K	10K		
1	R56	10K	10K		
1	R57	10K	10K		
1	R58	10K	10K		
1	R59	10K	10K		
1	R60	10K	10K		
1	R61	10K	10K		
1	R62	10K	10K		
1	R63	10K	10K		
1	R64	10K	10K		
1	R65	10K	10K		
1	R66	10K	10K		
1	R67	10K	10K		
1	R68	10K	10K		
1	R69	10K	10K		
1	R70	10K	10K		
1	R71	10K	10K		
1	R72	10K	10K		
1	R73	10K	10K		
1	R74	10K	10K		
1	R75	10K	10K		
1	R76	10K	10K		
1	R77	10K	10K		
1	R78	10K	10K		
1	R79	10K	10K		
1	R80	10K	10K		
1	R81	10K	10K		
1	R82	10K	10K		
1	R83	10K	10K		
1	R84	10K	10K		
1	R85	10K	10K		
1	R86	10K	10K		
1	R87	10K	10K		
1	R88	10K	10K		
1	R89	10K	10K		
1	R90	10K	10K		
1	R91	10K	10K		
1	R92	10K	10K		
1	R93	10K	10K		
1	R94	10K	10K		
1	R95	10K	10K		
1	R96	10K	10K		
1	R97	10K	10K		
1	R98	10K	10K		
1	R99	10K	10K		
1	R100	10K	10K		

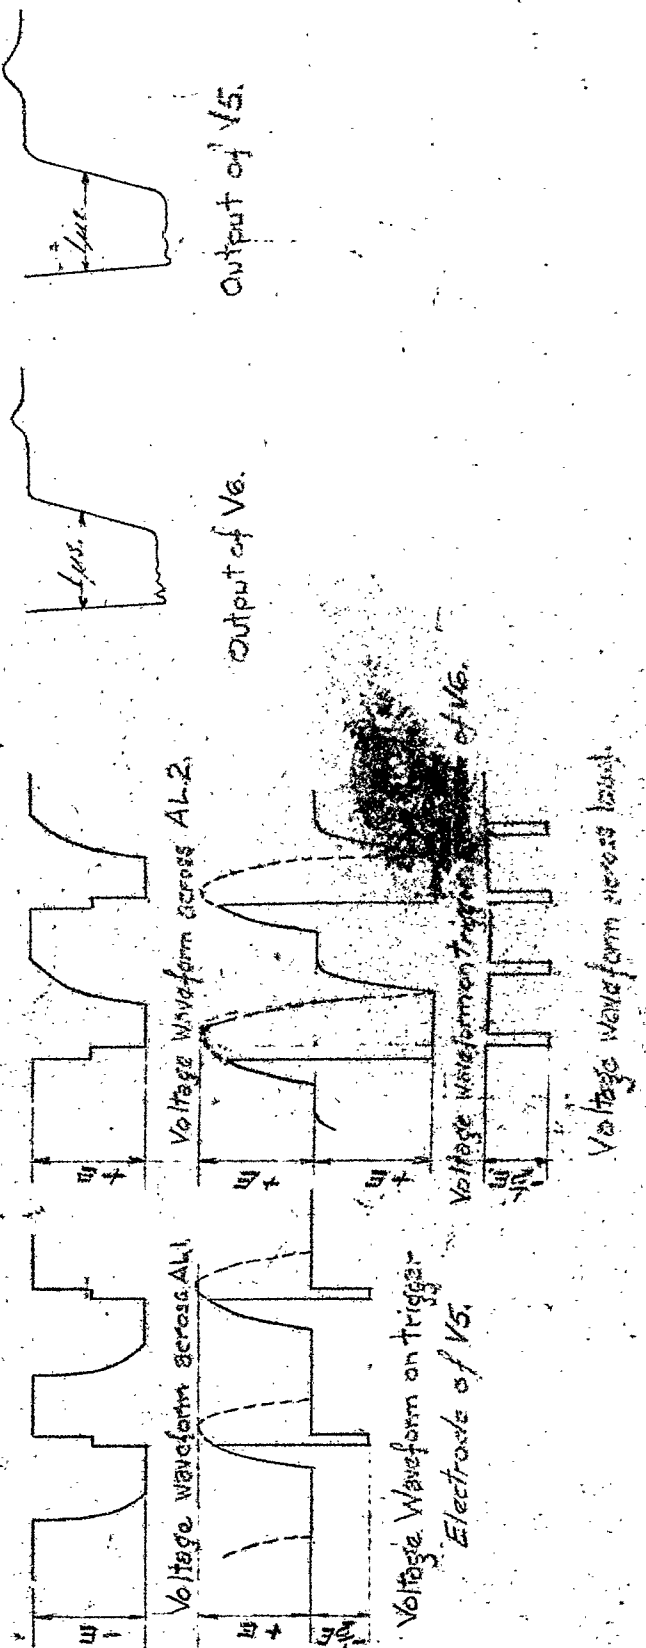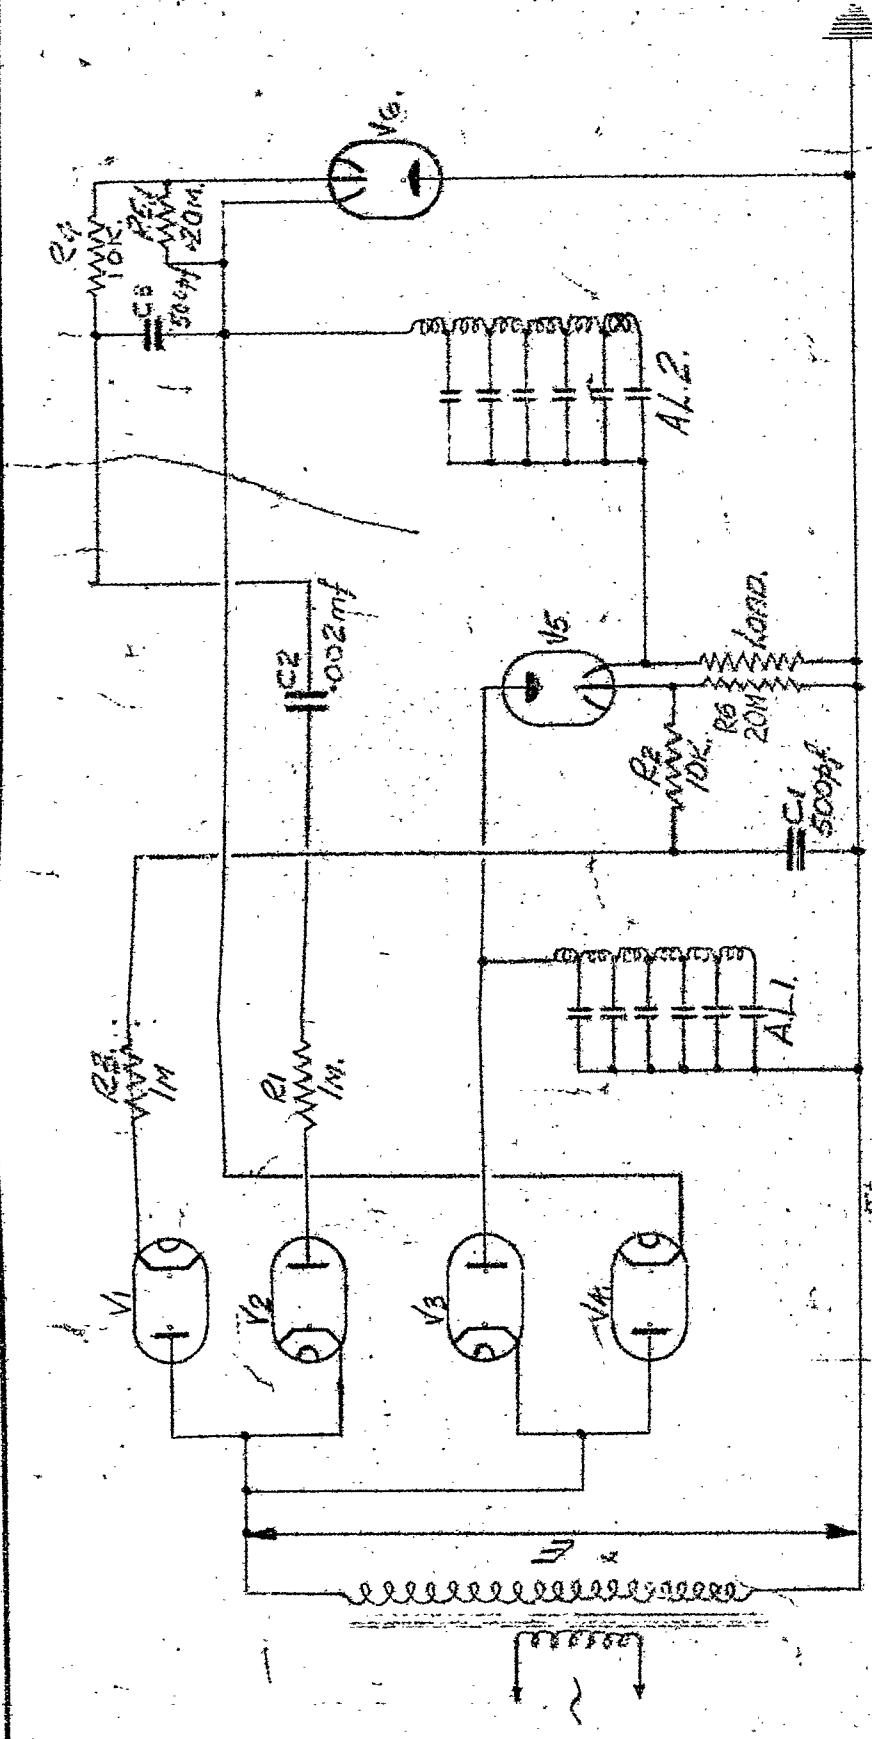

TRE. MAP.		DIAGRAM NO.	
G.T.R. 70/8/54			
TITLE: SIMPLE TRIGGERED SPARK GAP MODULATOR, FULL WAVE CRECT.			
ISSUE	DATE MOD NO	DRAWN: J. R. M. /	TRACED:
1	8-6-44		CHECKED:
			APPROVED:



*Information Centre  
Knowledge Services*  
**[dstl]** *Porton Down*  
*Salisbury*  
*Wiltshire*  
*SP4 0JQ*  
*22000-6218*  
*Tel: 01980-617782*  
*Fax: 01980-617770*

Defense Technical Information Center (DTIC)  
8725 John J. Kingman Road, Suit 0944  
Fort Belvoir, VA 22060-6218  
U.S.A.

AD#: AD0095319

Date of Search: 4 November 2009

Record Summary: AVIA 26/694

Title: Simplified Modulator for Component Testing

Availability Open Document, Open Description, Normal Closure before FOI Act: 30 years

Former reference (Department): T-1692

Held by: The National Archives, Kew

This document is now available at the National Archives, Kew, Surrey, United Kingdom.

DTIC has checked the National Archives Catalogue website (<http://www.nationalarchives.gov.uk>) and found the document is available and releasable to the public.

Access to UK public records is governed by statute, namely the Public Records Act, 1958, and the Public Records Act, 1967.

The document has been released under the 30 year rule.

(The vast majority of records selected for permanent preservation are made available to the public when they are 30 years old. This is commonly referred to as the 30 year rule and was established by the Public Records Act of 1967).

This document may be treated as **UNLIMITED**.